

Quick Check Cabinet Mount with Quick Tread Flush Mounted

HUNTER
Engineering Company




Cabinet Mount Quick Check and Flush Mount Quick Tread Installation

Site Specifications	
Power Requirements	115/230v, 15 amp* 50/60 Hz 1 ph ¹
Air Supply Req. (IS Units)	90-150 PSI (6.2-10.3 bar)
Approximate Air Consumption	25 SCFM @ 90 PSI (648 Lpm @ 6.2 bar)
Substructure Specifications	Refer to Form 6905-T
Pedestal Location	36 - 96 in. (914 - 2438 mm) from QT1F
Product Specifications	
Max. Wheel Weight	3500 lb. (1588 kg) per wheel
Test Entry Speed	2 to 8 mph (3-13 km/h)
Shipping Weight	
Quick Check Cabinet	290 lbs (132 kg)
Quick Check Drive Under Sensor	316 lbs (143 kg)
Quick Tread	1723 lbs (455 kg)

* Amperage shown is minimal circuit rating.

¹ Isolated ground recommended.

OVERALL FOOTPRINT

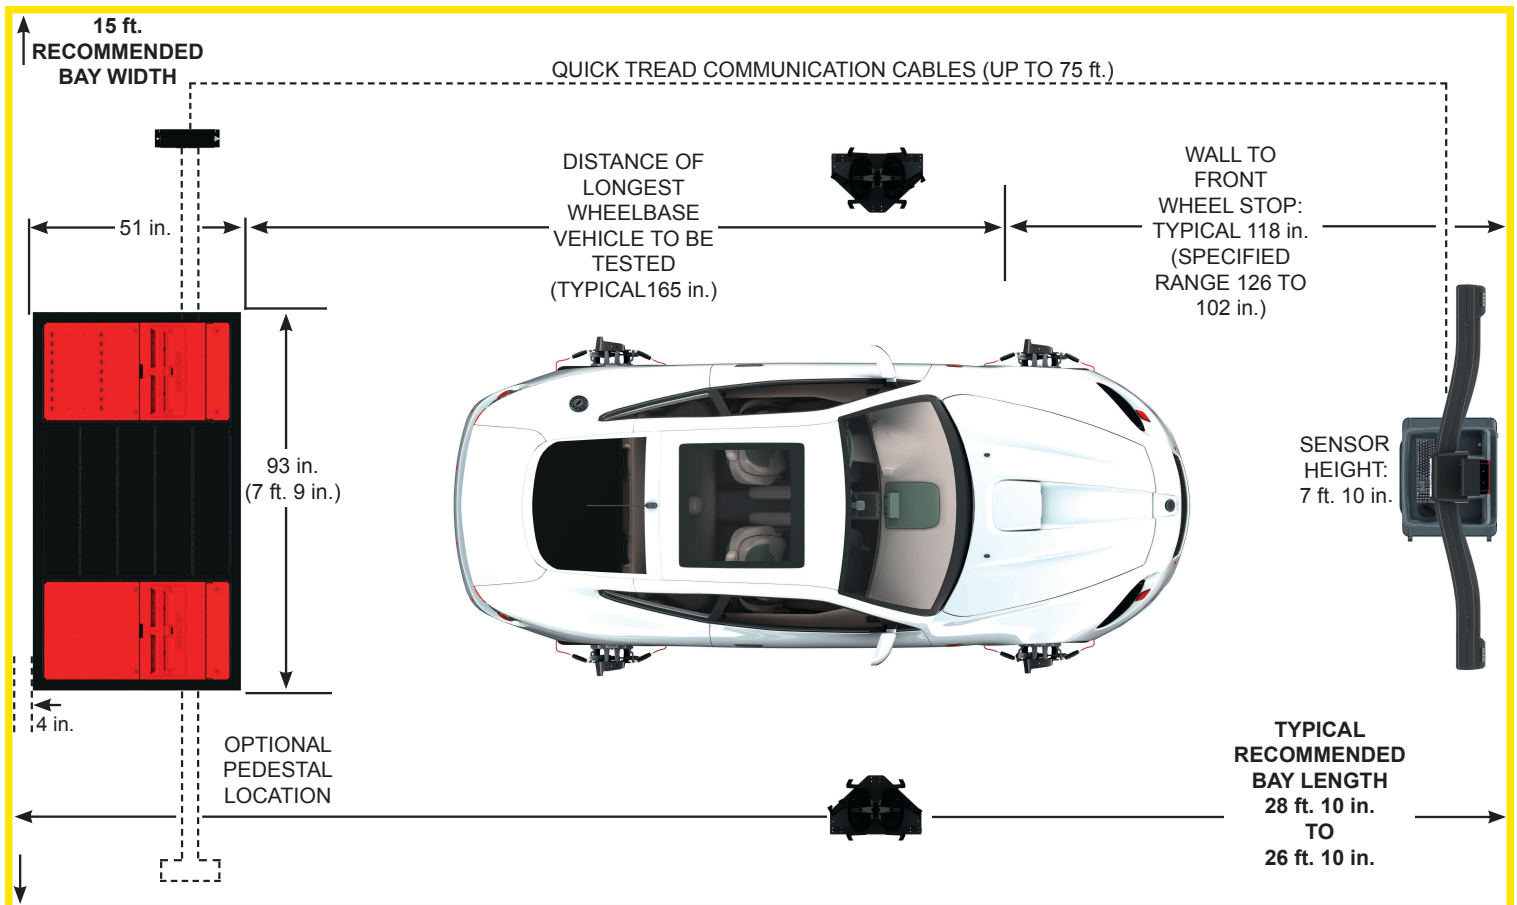

Continued on Page 2

For inspection information visit:
www.hunter.com/inspection

For general inquiries visit:
www.hunter.com
or call
800 448-6848

For local contact visit:
www.hunter.com/company/findrep.cfm


Form 6896-T, 05-15a
Copyright © 2015, Hunter Engineering Company

Quick Check Cabinet Mount with Quick Tread


Flush Mounted

HUNTER
Engineering Company

QUICK CHECK DIMENSIONS

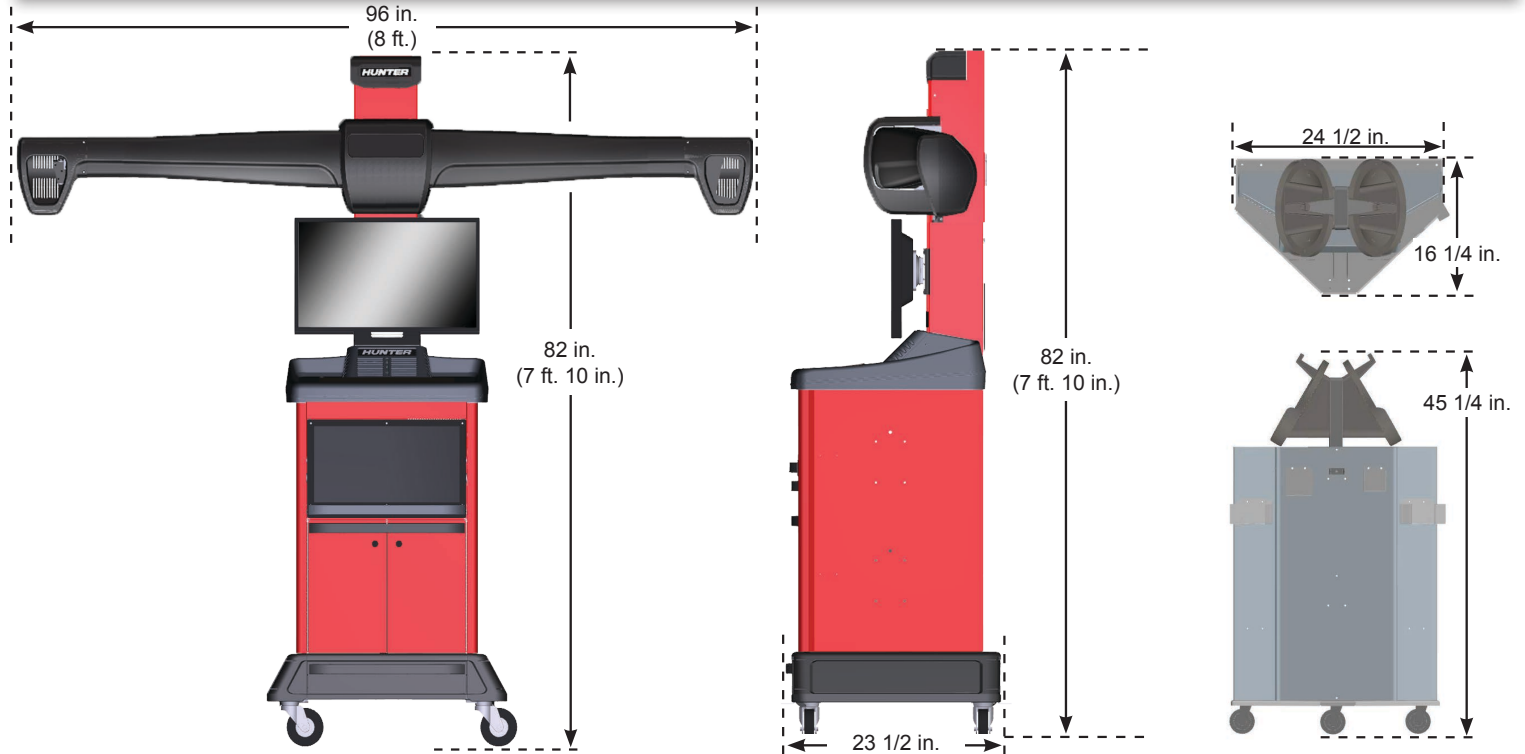

QUICK TREAD DIMENSIONS

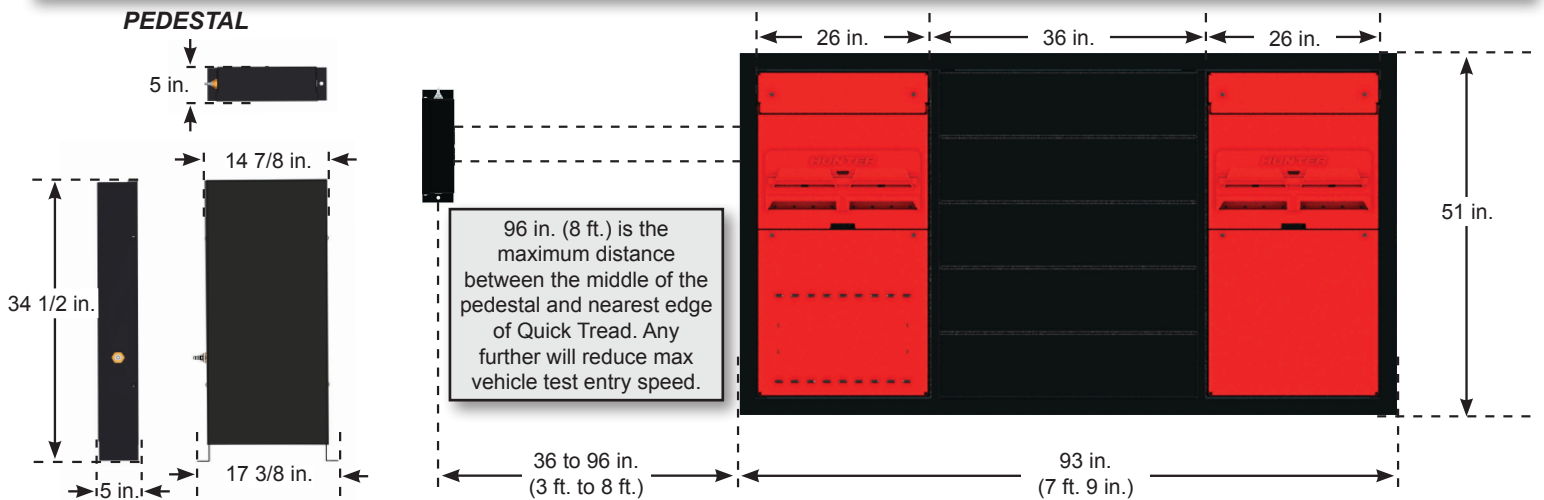

PIT & CONDUIT SPECIFICATIONS

